

ZERO[®]

BOB

PENDEL/PENDANT





BOB

PENDEL/PENDANT

Utförande

Lackerad aluminium. Vit RAL 9010, svart RAL 9005. Andra färger på begäran. Bländskydd av matt akryl.

LED info

Inbyggd LED modul dimbar 230V eller med DALI. Integrerad Casambi som tillbehör. Systemeffekt 10W. Armaturlumen 838LM. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning >RA 90.

Montage

Pendlas från tak, 2,5m kabel. Inklusive takkopp i gummi D125 mm. Takkopp i metall, D 120 mm, kan beställas separat

Anslutning

Kopplingsplint 3x4mm², vid DALI 5x4mm².

Design

Thomas Bernstrand & Stefan Borselius 2019.



Finish

Painted aluminum. White RAL 9010, black RAL 9005. Other colours on request. Matt acrylic diffuser.

LED info

Incorporated LED module. Mains dimmable or DALI. System power: 10W. Luminaire Luminous Flux: 838LM. CCT 3000K. SDCM 3. CRI >90.

Installation



Suspended from ceiling 2,5 m cable. Incl rubber ceiling cup D125 mm. Ceiling cup in metal, D120 mm, can be ordered separately.

Connection

Terminalblock 3x4 mm². When DALI 5x4mm².

Design

Thomas Bernstrand & Stefan Borselius 2019.

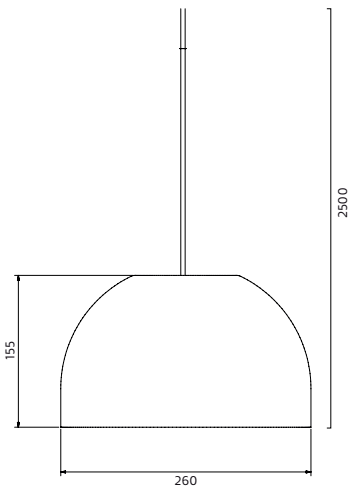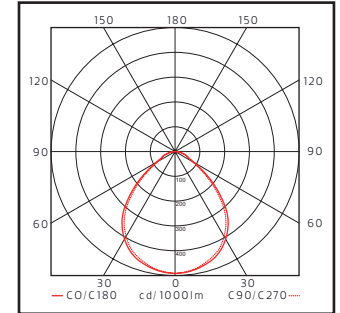

Rubber ceiling cup D125 mm included as standard.



ZERO[®]**BOB**

PENDEL/PENDANT

**PRODUKTFAKTA/PRODUCT SPECIFICATION**

EFFEKT/POWER	LJUSFLÖDE/LUMINAIRE FLUX	MODELL/MODELL	KELVIN/KELVIN	CRI	FÄRG/COLOUR	ART.
10W	838LM	230V dim, on/off	3000K	>90	Vit/White	19100101-30
10W	838LM	DALI	3000K	>90	Vit/White	19100101D30
10W	838LM	230V dim, on/off	3000K	>90	Svart/Black	19100106-30
10W	836LM	DALI	3000K	>90	Svart/Black	19100106D30

ZERO[®]

BOB

PENDEL/PENDANT



Head office:

Pukebergarnas väg,
SE-382 28 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:

Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00

info@zero.se