

**ZERO**<sup>®</sup>

CITY - INDOOR

LINMONTAGE/CATENARY

New improved fitting.



**ZERO**<sup>®</sup> CITY - INDOOR  
LINMONTAGE/CATENARY

Picture shows the old wire fitting



ZERO®

CITY - INDOOR

LINMONTAGE/CATENARY

Picture shows the old wire fitting





# CITY - INDOOR

LINMONTAGE/CATENARY

## Utförande

Lackerad aluminium. Svart RAL 9005 och gråbrun RAL 7006 som standard, andra färger på förfrågan. Inre skärm/reflektor i vitlackerad aluminium. Kan beställas utan galler på begäran

## Led info

Armaturlumen 2215LM Systemeffekt 223W. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA >80. L80, 80.000h.

## Montage

På vajer 3-6 mm.

## Anslutning

Kopplingsplint 5x4mm<sup>2</sup>. i kopplingsbox. Överkopplingsbar.

## Design

Thomas Bernstrand 2016.



New improved fitting.

## Finish

Painted aluminum, black RAL 9005 or beige grey RAL 7006 as standard. Other colours on request.. Internal shade in white painted aluminum. Can be made without grid on request

## Led info

System power 23W. Luminaire Luminous Flux 2215LM. CCT 3000K. SDCM 3. CRI >80. L80, 80.000h.

## Installation



On wire, 3-6 mm.

## Connection

Terminal block 5x4mm<sup>2</sup> inside junction box. Double conduit entry.

## Design

Thomas Bernstrand 2016.

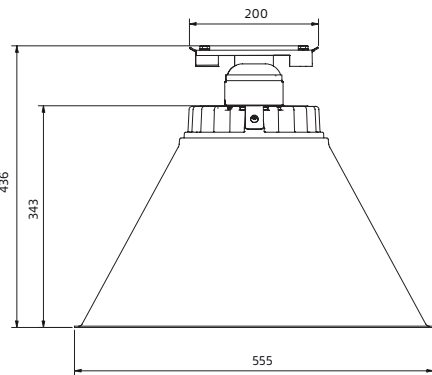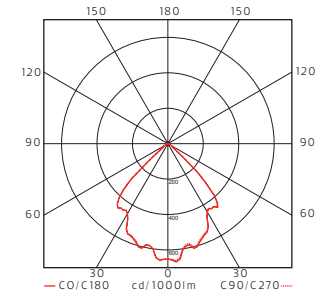

New improved fitting.



**ZERO**<sup>®</sup>

# CITY - INDOOR

LINMONTAGE/CATENARY

New improved fitting.



## PRODUKTFAKTA/PRODUCT SPECIFICATION

EFFEKT/POWER	KELVIN	CRI	W/KG	FÄRG /FINISH		ART.
<b>LED</b>						
23W/2215LM	3000K	>80	6,2	Svart/Black	On/Off	12086306-30
23W/2215LM	3000K	>80	6,2	Svart/Black	Dali	12086306D30
23W/2215LM	3000K	>80	6,2	Gråbrun/Beige grey	On/Off	12086366-30
23W/2215LM	3000K	>80	6,2	Gråbrun/Beige grey	Dali	12086366D30
D = Dimmbar med DALI alt SwitchDim/HFF = Dimmable DALI or SwitchDim.						
<b>E27 exklusive ljuskälla/E27 excluding light source.</b> E27 inkluderar inre matt glasglob/E27 include internal matt glass globe						
E27/Max 20W			6,2	Svart/Black		12090306
E27/Max 20W			6,2	Gråbrun/Beige grey		12090366

Med sin arketypiska form och generösa diameter på dryga halvmeteren är Citys användningsområde brett. Ingen risk för bländning då LED-källan sitter högt upp inuti den karaktärsfulla, branta konen där även ingjutna kylflänsar gömmer sig

With its archetypal shape and generous diameter, around half a metre. There is no risk of glare as the LED sits high in the characterful, steep cone, which also hides the cast cooling flange.

**ZERO**<sup>®</sup>

CITY - INDOOR

LINMONTAGE/CATENARY

New improved fitting.



**Head office:**

Friluftsvägen 2  
382 34 Nybro, Sweden  
+46(0)481 800 00  
info@zero.se

**Showroom Stockholm:**

Södermalmsallén 36,  
SE-118 28 Stockholm, Sweden  
+46(0)8-545 850 00

info@zero.se