

ZERO[®] LUMO
CATENARY IP65



ZERO[®] LUMO

CATENARY IP65

Finish

Painted die-cast aluminum in black RAL 9005. Wire-fitting in stainless steel.
Diffuser in matt acrylic. Other colours on request.

LED info

System power: 22W. Luminaire Luminous Flux 1690lm. CCT 3000K. SDCM 3. CRI 90.
L70/50000H.
Can be delivered with 2700K, 4000K on request.

Installation

On wire, 3-6mm.

Connection



Delivered with 2 m black cable and a 3-pin or 5-pin (Dali) screw connector x2,5mm²
Standard terminal box does not permit through-wiring.
Screw connector for through-wiring available on request.

Design

Thomas Bernstrand 2023.

IK 08

IK 10 on request.

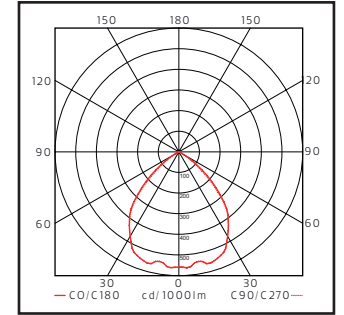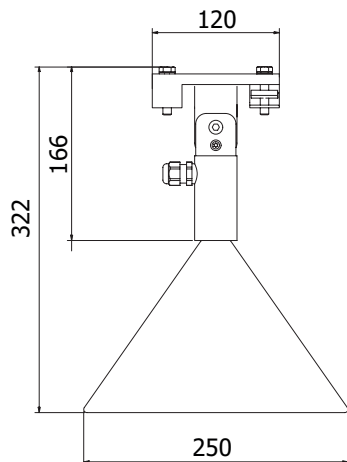



LUMO

CATENARY IP65



PRODUCT SPECIFICATION

POWER/LM	KELVIN	CRI	MODEL	COLOUR	ART.
22W/1690LM	3000	>90	On/Off	Black	12138106-30
22W/1690LM	3000	>90	DALI	Black	12138106D30

ACCESSORIES

3-pin screw connector for through-wiring x1,5mm ² /on-off installation	912138106
5-pin screw connector for through-wiring x1,5mm ² /DALI installation	912138306

ZERO[®]

LUMO

CATENARY IP65



Head office:

Friluftsvägen 2
SE-382 34 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:

Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00
info@zero.se