


ZERO[®] PUCK

STOLPARMATUR/POLE FIXTURE



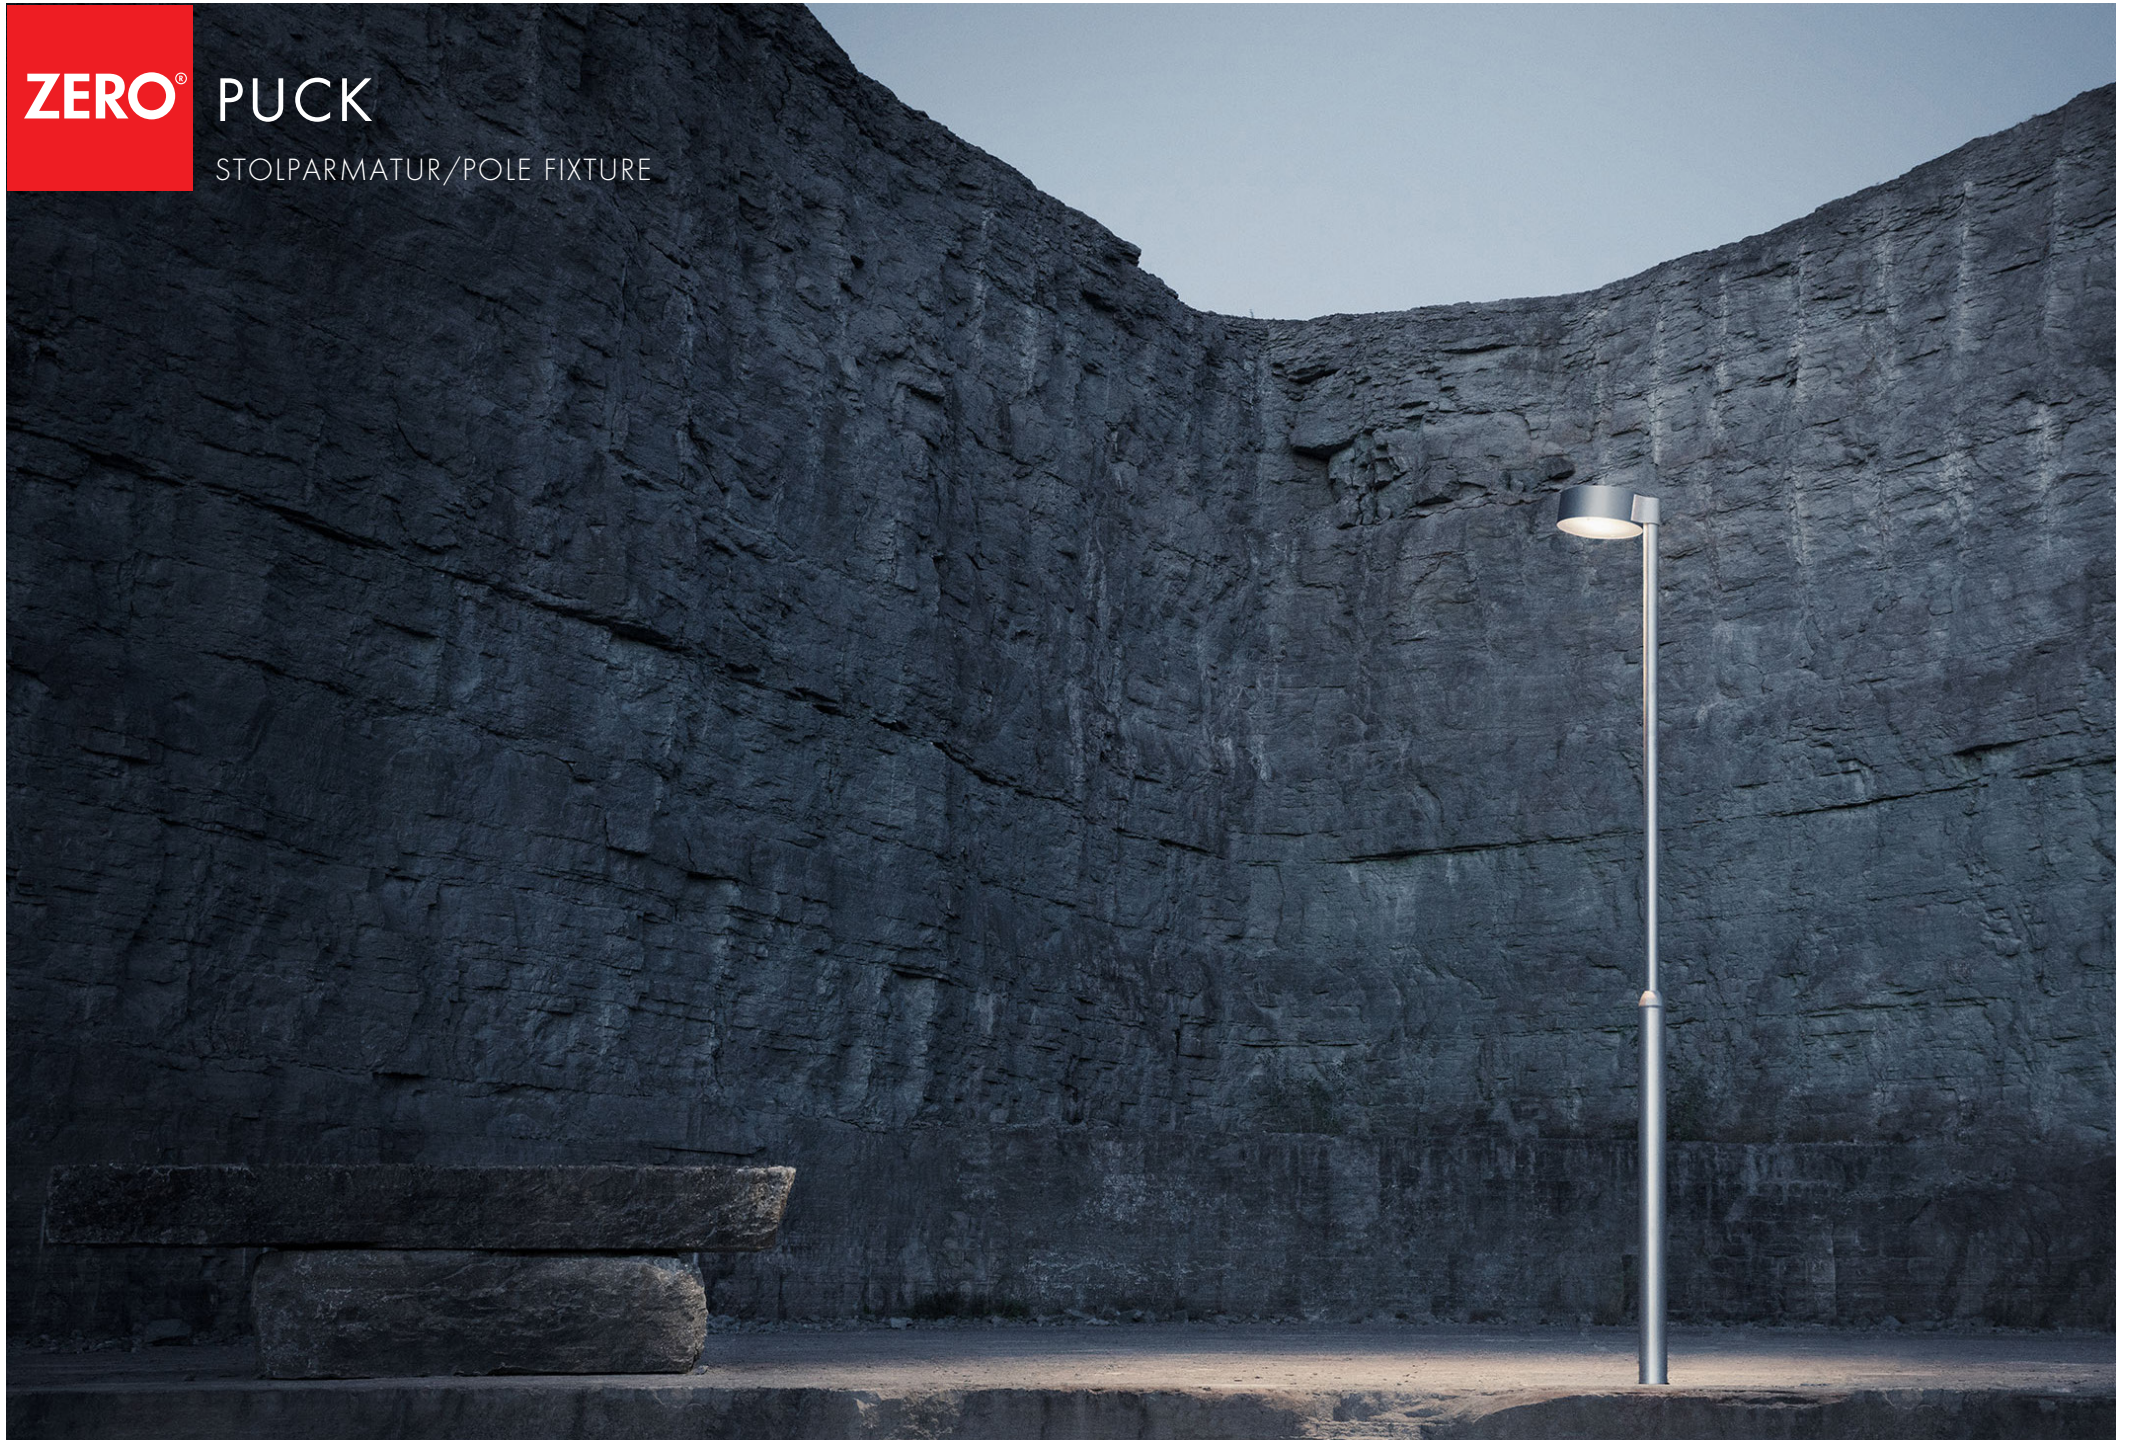

PUCK

STOLP ARMATUR/POLE FIXTURE

Utförande

Zinkad metallstomme lackerad med silvergrå polyesterlack RAL 9006. Bländskydd av härdat glas som hänger kvar vid ljuskällebyte.

LED info

Systemeffekt 28W. Armaturlumen se tabell. Korrelerad färgtemperatur 3000K. Färgtolerans SDCM 3. Färgåtergivning RA 80. L90 B10 100.000h.

Montage

Monteras på standardstolpe D60 mm. Stolpe finns som tillbehör. Fundament tillhandahålls ej av Zero.

Anslutning

Via säkringsinsats 4x10mm² i stolpe.

Design

R. Aosta.



Finish

Silver grey painted steel RAL 9006. Other colours on request. Diffuser of tempered glass.

LED info

System power: 28W. Luminaire Luminous Flux: see chart. CCT 3000K. SDCM 3. CRI 80. L90 B10 100.000h.

Installation

Fits pole diameter 60 mm


Connection

Terminal block 4x10mm²




Design

R. Aosta

Symmetrisk/Symmetrical

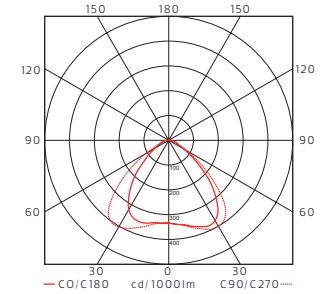

Asymmetrisk/Asymmetrical

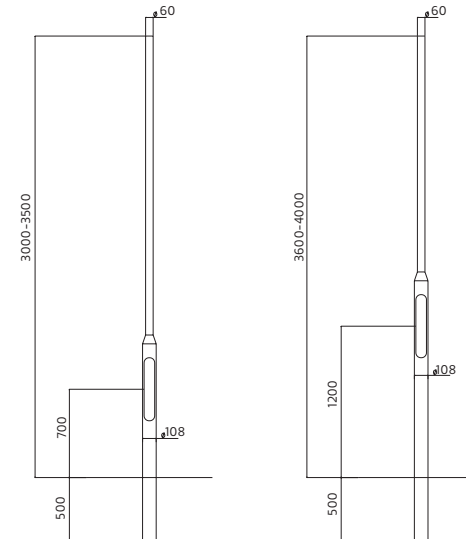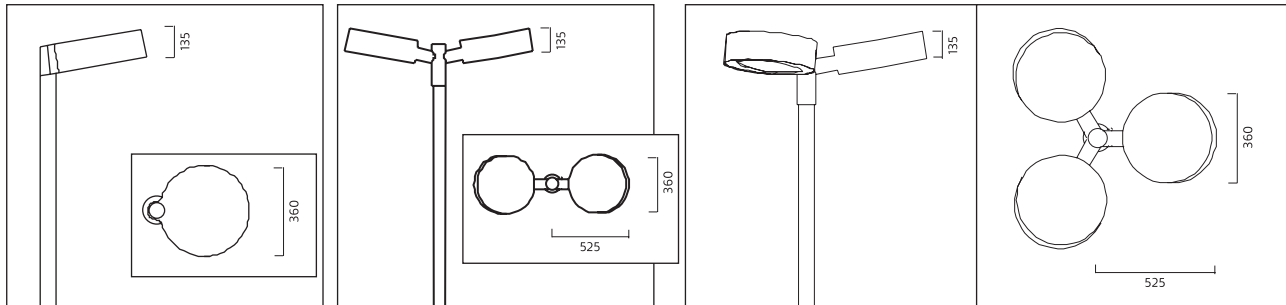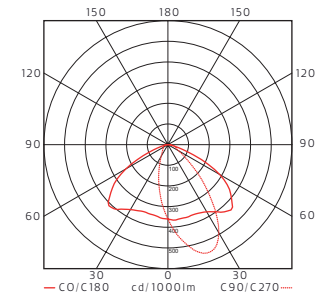

ZERO[®]**PUCK**

STOLPARMATUR/POLE FIXTURE

**PRODUKTFAKTA/PRODUCT SPECIFICATION**

| EFFEKT/POWER | LJUSFLÖDE/LUMINAIRE FLUX | CRI | KELVIN/KELVIN | MODELL/MODELL | | ART. |
|--------------------------|--------------------------|-----|---------------|--------------------------|--------|------------|
| One light head | | | | | | |
| 28W | 2298LM | >80 | 3000K | Symmetrisk/Symmetrical | On/Off | 3279110 |
| 28W | 2298LM | >80 | 3000K | Symmetrisk/Symmetrical | DALI | 3279110HFF |
| 28W | 2140LM | >80 | 3000K | Asymmetrisk/Asymmetrical | On/Off | 3380110 |
| 28W | 2140LM | >80 | 3000K | Asymmetrisk/Asymmetrical | DALI | 3380110HFF |
| Double lightheads | | | | | | |
| 2x28W | 2298LM | >80 | 3000K | Symmetrisk/Symmetrical | On/Off | 3279210 |
| 2x28W | 2298LM | >80 | 3000K | Symmetrisk/Symmetrical | DALI | 3279210HFF |
| 2x28W | 2140LM | >80 | 3000K | Asymmetrisk/Asymmetrical | On/Off | 3380210 |
| 2x28W | 2140LM | >80 | 3000K | Asymmetrisk/Asymmetrical | DALI | 3380210HFF |
| Three lightheads | | | | | | |
| 3x28W | 2298LM | >80 | 3000K | Symmetrisk/Symmetrical | On/Off | 3279310 |
| 3x28W | 2298LM | >80 | 3000K | Symmetrisk/Symmetrical | DALI | 3279310HFF |
| 3x28W | 2140LM | >80 | 3000K | Asymmetrisk/Asymmetrical | On/Off | 3380310 |
| 3x28W | 2140LM | >80 | 3000K | Asymmetrisk/Asymmetrical | DALI | 3380310HFF |

HFF = Dimbar DALI/Dimmable DALI

ACCESSORY, Only for Swedish standard installations into buried foundation.

| | |
|-------------------------------|------------|
| Grålackerad stolpe 3-4000mm | 93230-1-10 |
| Galvaniserad stolpe 3-4000 mm | 93230-1-83 |

ZERO[®]

PUCK

STOLP ARMATUR/POLE FIXTURE

PUCK IN CUSTOM BLACK COLOUR

Head office:

Pukebergarnas väg,
SE-382 28 Nybro, Sweden
+46(0)481 800 00
info@zero.se

Showroom Stockholm:

Södermalmsallén 36,
SE-118 28 Stockholm, Sweden
+46(0)8-545 850 00

info@zero.se